

FDX-3500

Singlemode
Fiber Extender



For the Extension of any USB Keyboard and Mouse, Stereo Audio, DVI-D and RS-232 Signals up to 15 Kilometers

The FDX-3500 consists of a transmitter and receiver that extend KVM, DVI-D, audio and RS-232 signals. It is a professional quality KVM capable of extending signals up to 15 Kilometers over a single multimode fiber optic cable.

Features

- Top Signal Quality at Maximum Extension Over Singlemode Fiber (15 Km)
- Superior Image Quality at all Resolutions
- Video Resolutions up to 1920 x 1200 at 60Hz (1280 x 1024 at 75Hz)
- Customizable/Programmable DDC Table
- Supports USB Keyboard/Mouse
- Touch Screen Compatible
- Supports Stereo Audio
- Supports DVI-D
- Supports RS-232 Control from 300bps to 115,000bps
- Supports all USB Keyboards Fully Transparent
- Fiber Plug Type LC, Singlemode
- Compatible With all Operating Systems
- Compatible With all Major KVM Switches
- Compact Metal Casing

Why Fiber Optic?

SmartAVI has created a full line of fiber optic extender products, understanding that this technology is superior to traditional cabling.

Fiber optic cables are:

- capable of transmitting over very long distances with no signal loss.
- immune to electromagnetic interference. In situations where there is considerable interference, fiber optic cabling is the only solution.
- much more secure because they cannot be easily tapped. For this reason, military and law enforcement agencies use fiber optic cables for the transmission of sensitive data.
- relatively inexpensive and small enough to be routed through small spaces.




Made in the USA

SmartAVI
SMART AUDIO VIDEO INNOVATION

www.smartavi.com

FDX-3500 Singlemode Fiber Extender

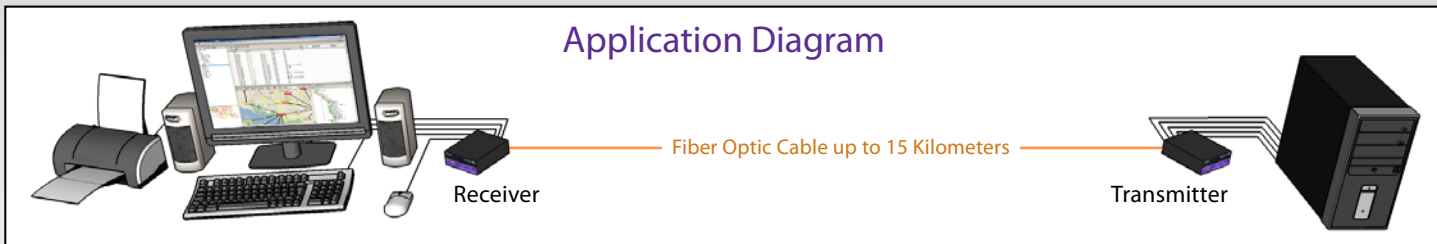

Specifications	
Video	
Input Interface	DVI-D Female (Single-Link)
Resolution	1920x1200 at 60Hz
DDC	Internal Table can be Re-programmed
Audio	
Signal Type	Stereo Audio
Bandwidth	15MHz, 0dB
Impedance	10K Ohm
Connector	3.5mm Stereo Mini Female
Other	
RS-232	Data up to 115,000bps
USB	USB Keyboard and Mouse Compliant
Fiber Extender	Duplex LC Connector Eye Safety Designed to meet Laser Class 1 comply with EN60825-1 Operates at a nominal wavelength of 1310nm Distance 15km 1310nm FP
Dimensions	4.5"x5.5"x1.70"
Weight	8 Lbs.

Ordering Information		
Part No.	Qty.	Description
FDX-TX3500	1	FDX-3500 Singlemode Transmitter
FDX-RX3500	1	FDX-3500 Singlemode Receiver
PS5V3A	2	Power Supply (2) 5V 3A

Applications

- Corporate or Educational Presentations
- Financial (Remote Servers/User Control)
- Call Centers
- Industrial (Long-Range Workstation Isolation)
- Information Terminals/Kiosks
- Airport Installations (Air Traffic Control/Passenger Information)
- KVM Extension where Exceptional Quality of Signal is Crucial
- Medical (Remote Operation Away from Sensitive/Magnetic Equipment)
- Recording (for Large Studios where Editing/Mixing Stations are Compact and/or Require Complete Silence)

FDX-3500 Receiver Front



FDX-3500 Receiver Rear



Many leading companies have recognized and embraced the innovation of SmartAVI's technologies and have successfully incorporated them into their organizations. Users of SmartAVI include:



SmartAVI, Inc. / Twitter: smartavi
 2840 N. Naomi Ave. Burbank, CA 91504
 Tel: (818) 565-0011 Fax: (818) 565-0020
<http://www.SmartAVI.com>

Smart-*AVI*
 SMART AUDIO VIDEO INNOVATION