

# FDX-AV *Multimode Fiber Extender*



## FDX-AV is a Fiber Optic Digital Signage and Multimedia Signal Extender that Transmits Stereo Audio, DVI-D and RS-232 Data up to 1,400 Feet

The FDX-AV consists of a transmitter and receiver that extend DVI-D, audio and RS-232 signals. Equipped with DVI-D connectors for multi-mode signals, this product is the perfect fiber solution for professional digital signage and multimedia presentation needs.

It is capable of extending signals up to 1,400 feet over a single multimode fiber optic cable.

### Features

- Top Signal Quality at Maximum Extension Over Multimode Fiber (1,400 ft.)
- Superior Image Quality at all Resolutions
- Video Resolutions up to 1920 x 1200 at 60Hz (1280 x 1024 at 75Hz)
- Customizable/Programmable DDC Table
- Supports Stereo Audio
- Supports DVI-D
- Supports RS-232 Control from 300bps to 115,000bps
- Fiber Plug Type LC
- Compatible With all Operating Systems
- Compact Metal Casing

### Why Fiber Optic?

SmartAVI has created a full line of fiber optic extender products, understanding that this technology is superior to traditional cabling.

Fiber optic cables are:

- capable of transmitting over very long distances with no signal loss.
- immune to electromagnetic interference. In situations where there is considerable interference, fiber optic cabling is the only solution.
- much more secure because they cannot be easily tapped. For this reason, military and law enforcement agencies use fiber optic cables for the transmission of sensitive data.
- relatively inexpensive and small enough to be routed through small spaces.




Made in the USA

**SmartAVI**  
SMART AUDIO VIDEO INNOVATION

[www.smartavi.com](http://www.smartavi.com)

# FDX-AV Multimode Fiber Extender

## Application Diagram

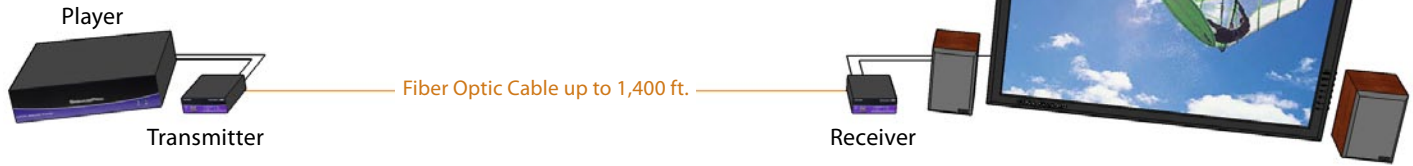

## Specifications

Video	
Input Interface	DVI-D Female (Single-Link)
Resolution	1920x1200 at 60Hz
DDC	Internal Table can be Re-programmed
Audio	
Signal Type	Stereo Audio
Bandwidth	15MHz, 0dB
Impedance	10K Ohm
Connector	3.5mm Stereo Mini Female
Other	
RS-232	Data up to 115,000bps
DB-9	Female for TX, Male for RX
Fiber Extender	Fiber • 225m @ Multimode 62,5µ • 450m @ Multimode 50µ Fiber-Plug type LC
Dimensions	4.5"x5.5"x1.70"
Weight	8 Lbs.

## Applications

- Corporate or Educational Presentations
- Information Terminals/Kiosks
- Airport Installations (Air Traffic Control/Passenger Information)
- Sports Arenas or Public Facilities
- Restaurants and Lounges
- Resorts and Casinos
- Houses of Worship
- Theme Park Design
- Civic Centers
- Shopping Malls
- Concerts or any Large-Scale Multimedia Venue
- Mass-Transit Vehicles
- Convention Centers

FDX-AV Receiver Front



FDX-AV Receiver Rear



## Ordering Information

Part No.	Qty.	Description
FDX-TXAV	1	FDX-AV Multimode Transmitter
FDX-RXAV	1	FDX-AV Multimode Receiver
PS5V3A	2	Power Supply (2) 5V 3A

Many leading companies have recognized and embraced the innovation of SmartAVI's technologies and have successfully incorporated them into their organizations. Users of SmartAVI include:



SmartAVI, Inc. / Twitter: smartavi  
 2840 N. Naomi Ave. Burbank, CA 91504  
 Tel: (818) 565-0011 Fax: (818) 565-0020  
<http://www.SmartAVI.com>

**Smart-AVI**  
 SMART AUDIO VIDEO INNOVATION

[www.smartavi.com](http://www.smartavi.com)

Made in the USA