

What's in the Box?

PART NO.	QTY	DESCRIPTION
FDX-TXAV	1	FDX-AV Transmitter Unit - DVI-D, Stereo Audio and RS-232 Extender over Fiber Optic Cable
FDX-RXAV	1	FDX-AV Receiver Unit - DVI-D, Stereo Audio and RS-232 Extender over Fiber Optic Cable
Power Supply	2	PS5VDC4A

Technical Specifications

VIDEO	
Format	DVI-D Single Line
Maximum Pixel Clock	165 MHz
Input Interface	(1) DVI-D 29-pin female
Output Interface	(1) DVI-D 29-pin female
Resolution	Up to 1920 x 1200 @60Hz
DDC	Internal
Input Equalization	Automatic
Input Cable Length	Up to 20 ft.
Output Cable Length	Up to 20 ft.
AUDIO	
Frequency Response	20 Hz to 20 KHz
Impedance	600 ohm
Nominal Level	0-1.0 V
Common Mode	Rejection at 60dB
Input Interface	(1) 3.5 mm Stereo Audio
Output Interface	(1) 3.5 mm Stereo Audio
OTHER	
Power	External 100-240 VAC/5VDC4A @20W
Dimensions	4.5"W x 5.375"H x 1.75"D
Weight	1 lb.
Approvals	UL, CE, ROHS Compliant
Operating Temp.	32-131°F (0-55 °C)
Storage Temp.	-4-185 °F (-20-85 °C)
Humidity	Up to 95%
RS-232	Data up to 115,000 bps

© Copyright 2012 Smart-AVI, All Rights Reserved

NOTICE

The information contained in this document is subject to change without notice. SmartAVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

SmartAVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from SmartAVI.

For more information, visit www.smartavi.com.

FDX-AV Receiver Front



FDX-AV Receiver Rear



Smart-AVI
SMART AUDIO VIDEO INNOVATION

SmartAVI, Inc. / Twitter: smartavi
11651 Vanowen St. North Hollywood, CA 91605
Tel: (818) 503-6200 Fax: (818) 503-6208
<http://www.SmartAVI.com>

Smart-AVI
SMART AUDIO VIDEO INNOVATION

Installation Manual

FDX-AV

DVI-D Video, Stereo Audio, and RS-232 Extender over Fiber Optic Cable



The FDX-AV consists of a transmitter and receiver that extend DVI-D, audio and RS-232 signals up to 1,400 feet over a single multimode fiber optic cable.

www.smartavi.com

Introduction


The FDX-AV consists of a transmitter and receiver that extend DVI-D, audio and RS-232 signals up to 1,400 feet over a single multimode fiber optic cable.

Features

- Top Signal Quality at Maximum Extension Over Multimode Fiber (1,400 ft.)
- Superior Image Quality at all Resolutions
- Video Resolutions up to 1920 x 1200 at 60Hz (1280 x 1024 at 75Hz)
- Customizable/Programmable DDC Table
- Supports Stereo Audio
- Supports DVI-D
- Supports RS-232 Control from 300bps to 115,000bps
- Supports all USB Keyboards Fully Transparent
- Fiber Plug Type LC
- Compatible With all Operating Systems
- Compatible With all Major KVM Switches
- Compact Metal Casing

Applications

- Corporate or Educational Presentations
- Financial (Remote Servers/User Control)
- Call Centers
- Industrial (Long-Range Workstation Isolation)
- Information Terminals/Kiosks
- Airport Installations (Air Traffic Control/Passenger Information)
- KVM Extension where Exceptional Quality of Signal is Crucial
- Medical (Remote Operation Away from Sensitive/Magnetic Equipment)
- Recording (for Large Studios where Editing/Mixing Stations are Compact and/or Require Complete Silence)

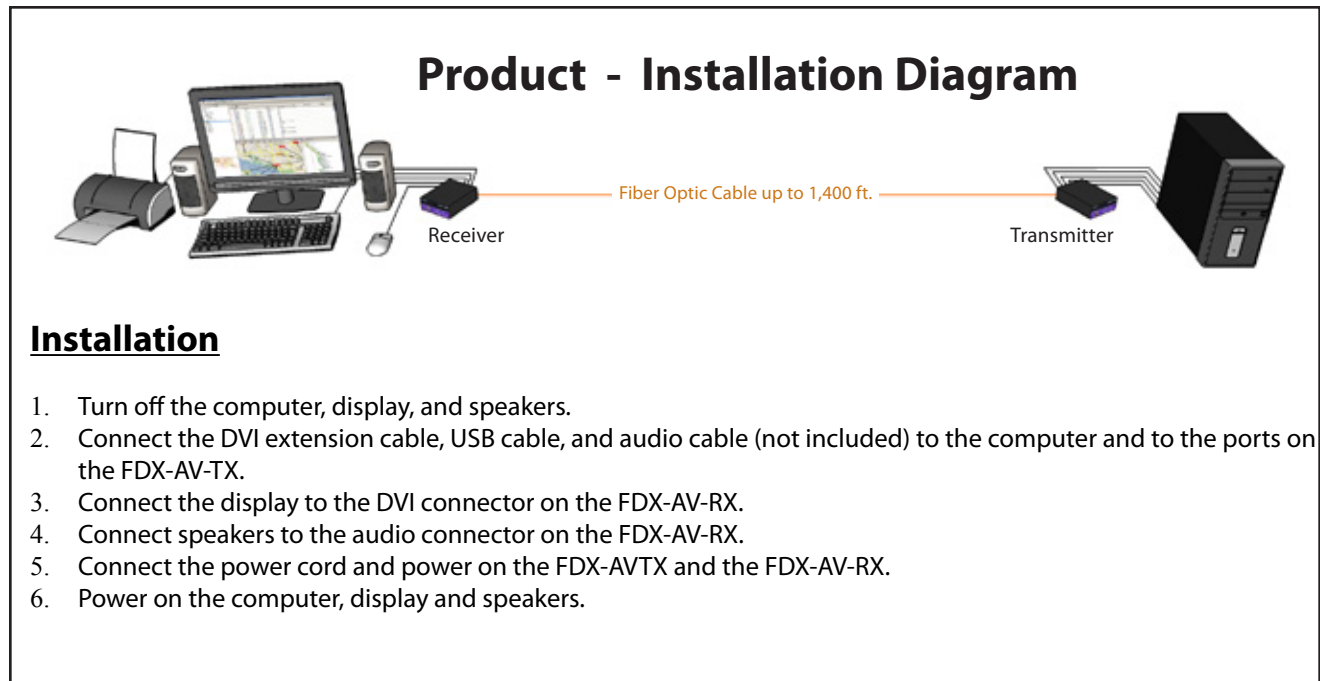

Why Fiber Optic?

SmartAVI has created a full line of fiber optic extender products, understanding that this technology is superior to traditional cabling.

Fiber optic cables are:

- capable of transmitting over very long distances with no signal loss.
- immune to electromagnetic interference. In situations where there is considerable interference, fiber optic cabling is the only solution.
- much more secure because they cannot be easily tapped. For this reason, military and law enforcement agencies use fiber optic cables for the transmission of sensitive data.
- relatively inexpensive and small enough to be routed through small spaces.